

PHILIPPINE SCIENCE HIGH SCHOOL SYSTEM		REQUEST FOR QUOTATION FORM & NOTICE
		GOODS
Office/Campus:	PHILIPPINE SCIENCE HIGH SCHOOL-ZAMBOANGA REGION CAMPUS	
Address/Contact Details:	Cogon, Dipolog City	

GENTLEMEN:

Quotation No.:

2021-08-0145

Date:

August 13, 2021

May we request for quotation on materials enumerated hereunder. If you are interested and in a position to furnish the same, we shall be glad to have your best prices.

Delivery within _____ working days upon receipt of approved Purchase Order (PO).

In case of failure to make the full delivery/completion within the time specified as offered/required, the Supplier/ Contractor shall be liable for liquidated damages/penalty of one-tenth (1/10) of one percent (1%) of the Contract Price per calendar day of delay minus the value of the delivered/completed portion(s) of the approved P.O./Contract.


Item #	QTY	UNIT	ITEM/DESCRIPTION	UNIT COST	TOTAL COST
PRICES MUST BE Tax (VAT) INCLUSIVE					
1	1	lot	Design One Line Diagram of the Attached Layout and have it Signed and Sealed by a Professional Mechanical Engineer Supply of Materials and Labor for the Installation of Gas Line for the Science Laboratory at the Ground Floor of PSHS-ZRC'S Academic Building		
	6	length	Black Steel Pipe 1" Ø. Sch.40 Seamless		
	14	pc	Black Steel Pipe 1/2" Ø. Sch.40 Seamless		
	29	pc	B.I. Nipple 3/8 x 6		
	4	pc	B.I. Elbow, 90deg. 1.0" threaded		
	9	pc	B.I. Elbow, 90deg. 1/2" threaded		
	9	pc	B.I. Reducing Tee 1 x 1/2		
	16	pc	B.I. Tee 1/2 x 1/2 x 3/8		
	4	pc	B.I. Coupling Reducer 1 x 1/2		
	29	pc	B.I. Coupling Reducer 1/2 x 3/8		
	2	pc	B.I. Coupling Reducer 1 x 3/4		
	4	pc	B.I. Coupling Reducer 1/2 x 3/4		
	2	pc	B.I. End Cap 1"		
	9	pc	B.I. End Cap 1/2"		
	1	length	1/4" x 1" x 20 ft. Flat Bar		
	1	length	1/4" x 1-1/2" x 1-1/2" Angle Bar		
	2	length	10mm full threaded round bar		
	20	pc	Anchor Grip		
	5	kg	Welding Rod 6012, Fuji. 1/8		
	4	can	Pipe Joint Compound		
	1	gal	Red Oxide		
	1	gal	International Fire Red, Enamel		
	1	gal	Epoxy Reducer		
	1	pc	Cuting Wheel 14"		
	20	pc	Cutting Disc		
	20	pc	Flap Disc #120		
	2	Unit	Pressure Regulator 1"		

4	Unit	Pressure Regulator 1/2"		
2	Unit	Pressure Gauge		
2	Unit	Ball Valve 1" SS Heavy Duty for Gas		
4	Unit	Ball Valve 1/2" Stainless Steel Heavy Duty for Gas		
29	Unit	Ball Valve 3/8		
4	cyl	Gas Cylinder empty 50Kgs. Capacity		
4	cyl	Gas Refill 50Kgs.		
29	pc	Hydraulic Hose 2 meter		
1	lot	Labor charges		
		Note: To include delivery of materials to PSHS-ZRC in Cogon, Dipolog City		
			TOTAL	

Approved Budget: Php. 460,039.77

Delivery Term within 35 days
 Delivery Time within the specified contract duration (35 days)
 Payment Term within 30 days after completion of the project

Very truly yours,


HAZEL R. LAGAPA
 BAC Chairperson

**PRICES IN THE ABOVE OFFER ARE
 CERTIFIED TRUE AND CORRECT:**

Authorized Company
 Representative :

 (Signature Over Printed Name)

Company Name :


Address :

Telephone nos. :

T.I.N. :

IMPORTANT

1. Prices must be written clearly.
2. If offering a substitute/equivalent, specify the brand and make.

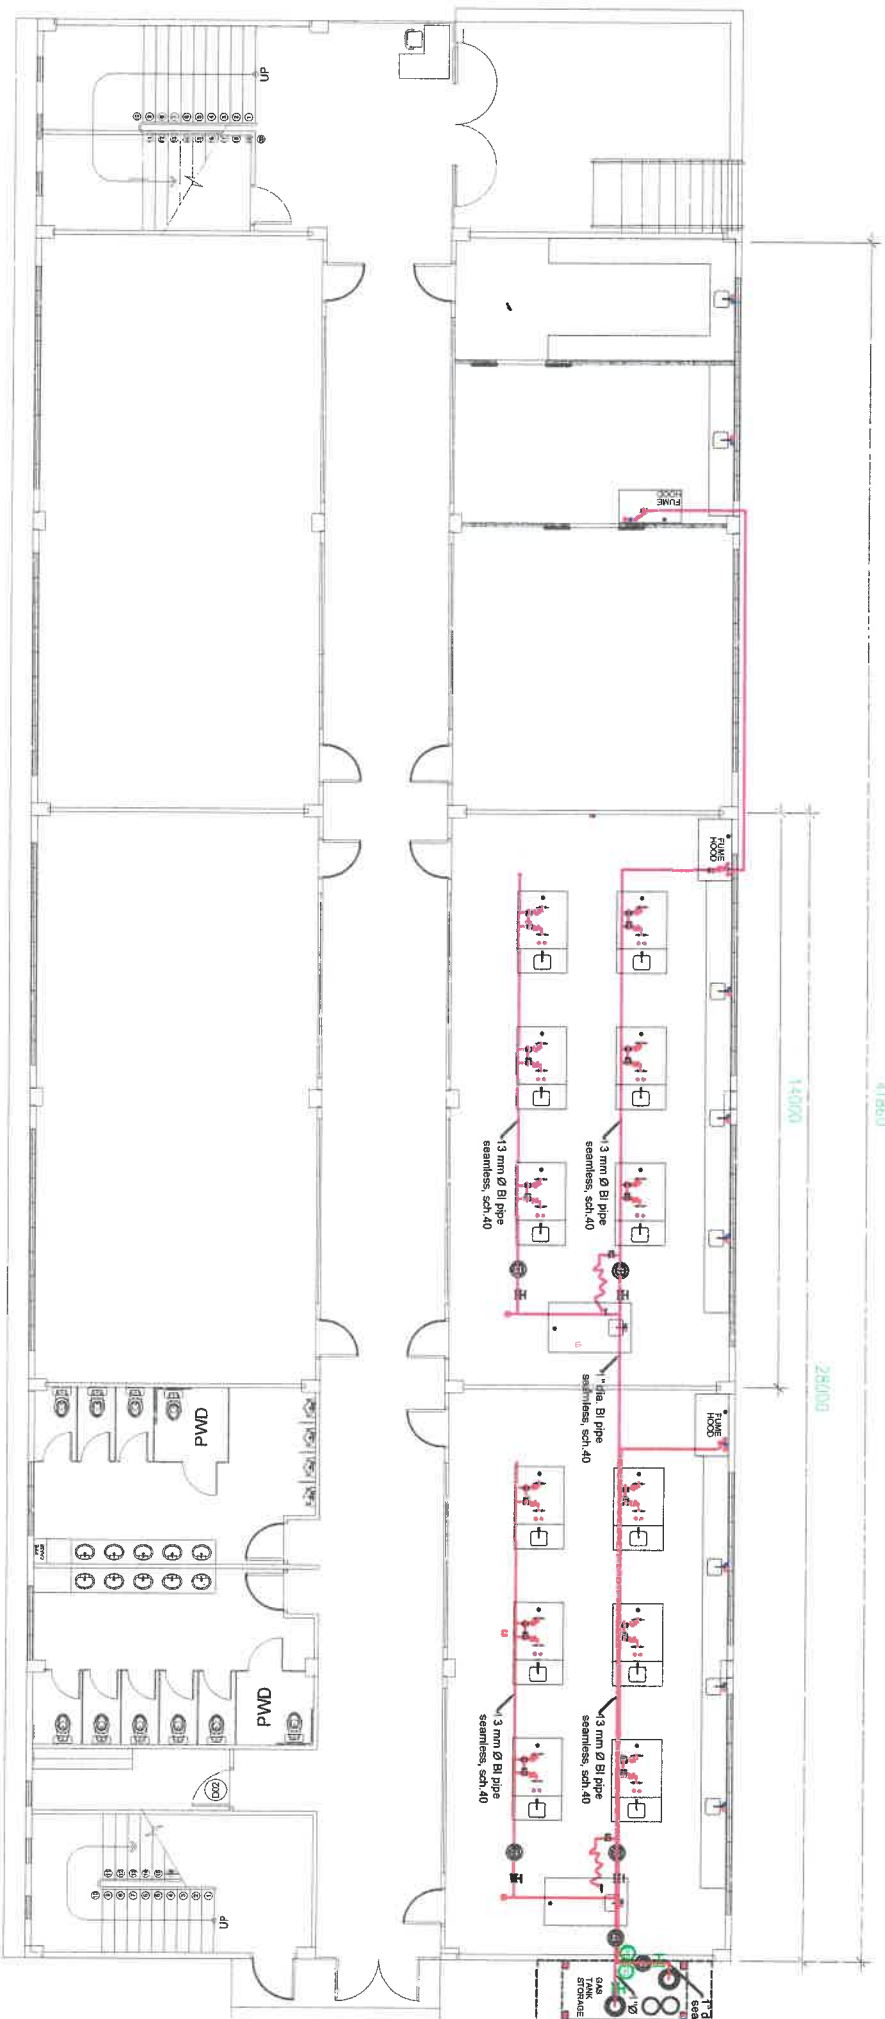

SCIENCE LABORATORY GAS LINE LAYOUT



REPUBLIC OF THE PHILIPPINES
 DEPARTMENT OF SCIENCE AND TECHNOLOGY
 PHILIPPINE SCIENCE HIGH SCHOOL
 ZAMBANGA PENINSULA REGION CAMPUS
 BRGY. COCON, DIPLOLO CTRY. ZAMBANGA DEL NORTE

PROJECT TITLE:
 CONSTRUCTION AND INSTALLATION OF WATERLINE,
 ELECTRICAL LINE AND GAS LINE STUB-OUTS FOR
 SCIENCE LABORATORY ROOMS

PREPARED BY:
 ENGR. ANTONIO P. ESCABARTE JR.
 RE-PSHS

RECOMMENDING APPROVAL:
 MILO S. SALDON
 AD-CHIEF

APPROVED:
 ENGR. LOUIE C. JAMORA PAE, MSC
 CAMPUS DIRECTOR

SAFE